

Marke: SUNWARD
Modell: SWE 25UF

Preis: POA

Ref: SUN5005

Marke/Modell: SUNWARD SWE 25UF

Jahr: 2025

Bedingung: Brand New


Zusätzliche Daten.:

- Machine weight: 2650kg
- 5 year warranty
- 3 year full engine warranty
- Yanmar EU stage V engine
- Complete with 3 buckets
- Hydraulic quick hitch
- Zero tail swing
- 2 speed tracking







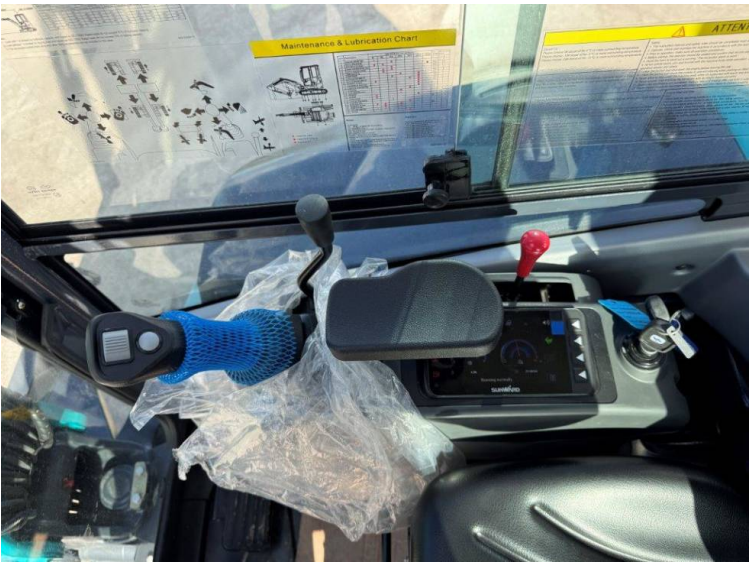

Portable and Optimized

SMOOTH OPERATIONS
THANKS TO

Auto gear shifting during traveling

Best digging forces and long-reach capacity on the market

The SWE 25F and SWE 25XF have exceptional digging forces – 24 kN (bucket) and 14 kN (arm) easily rivalling any 2.5t excavator competitors on the market. And when it comes to their long-reach capacity, the SWE 25F's boom cylinder design provides a maximum reach of over 4.6 meters (4.645 m), and the zero-tail SWE 25XF's boom cylinder provides a digging reach that's over 4.7 meters (4.775 m) long – making these 2 mini excavators the benchmark

Pilot traveling controls

Protection plates for boom and dozer cylinders

When excavating in the field, an excavator's boom cylinders are particularly at risk of damage caused by flying stones. We've taken special care to protect the booms and dozer cylinders with our new plates, so that the operator can focus fully on his job and not worry about the machine's components. And when you get your machine, you know it will come back in good condition, ready for many more hours on the job.



iliary lines as standard

ring and design produce optimal, versatile machines

Equipped from the

Auxiliary lines as standard
 With complete auxiliary settings built in as standard, the SW 25UF tail SWE 25UF provide fully adjustable pressure and flow for all types of attachments on any job site.

no less than 3 separate auxiliary lines as standard (while the main line is 1 to 2 lines as standard), which are distributed as follows: 1) a line at the bottom of the arm (AUX1), which is used primarily for the quick-hitch; 2) a line at the top of the arm (AUX2) to provide greater flow to fulfill the requirements of a flow-demanding attachment, such as a breaker (AUX2); 3) a line at the bottom of the arm (AUX3) to provide greater flow as an extra line for attachments that are equipped with high-flow hydraulic pumps (AUX3).

Extra protection
for hoses/AUX 2 line

Compact for easy transport

A 2.51 mini excavator's versatility starts with how well it is designed for transportation. The S96 25F and S96 250F do more than simply align with the EU's transportation regulations – truly compact (1500 mm width) and lightweight (2 640–2 650 kg), these machines allow easy, safe and secure transport. With automatic slew lock and 4 easily accessed tie-down points on the upper frame, the machines can be safely transported on a small trailer with up to 3 buckers and a hydraulic breaker.


Ready for all kinds of jobs

The SWE 25F and SWE 25UF enjoy full factory fitted equipment from Day 1, including all the features to welcome the most demanding attachment, i.e. the tiltrator.

WORKING RANGE

		SRM 2000	SRM 2000
WORKING DIMENSIONS	Max. cutting height	4,600 mm	3,900 mm
	Max. hauling height	3,900 mm	3,000 mm
	Max. digging depth	3,700 mm	2,960 mm
	Max. vertical wall digging depth	2,475 mm	2,080 mm
	Max. digging reach	4,600 mm	4,775 mm
	Max. swing angle (left/right)	90°/90°	90°/90°
	Front swing radius	3,900 mm	3,080 mm
	Tail swing radius	1,000 mm	760 mm
	Max. digging force (3rd)	16,000	16,000
	Max. digging force (2nd/1st)	24,000	23,000


25F



LIFTING CAPACITY

TIME STEP												
Lift Point Height (m)	Lift Point radius (300)		Lift Point radius (2.5 m)		Lift Point radius (2.5 m)		Lift Point Height (m)	Lift Point radius (300)		Lift Point radius (2.5 m)		Lift Point radius (2.5 m)
	Start time (s)	Start size (m)	Start time (s)	Start size (m)	Start time (s)	Start size (m)		Start time (s)	Start size (m)	Start time (s)	Start size (m)	
1.5	435.00*	324.00*	300.00*	375.00*	--	--	1.8	374.00*	300.00*	--	--	--
1.8	402.00*	306.00*	300.00*	375.00*	--	--	1.5	396.00*	270.00*	640.00*	400.00*	--
2.0	375.00*	288.00*	300.00*	375.00*	--	--	0	530.00*	240.00*	500.00*	340.00*	1270.00*
-0.8	570.00*	432.00*	750.00*	300.00*	1500.00*	640.00	0	630.00*	240.00*	500.00*	340.00*	1270.00*
-1.0	570.00*	432.00*	750.00*	300.00*	1500.00*	640.00	0	630.00*	240.00*	500.00*	340.00*	1270.00*

1. Load with " is intended for hydraulic capacity and based on ISO 9907. Rated loads do not exceed 87% of full rated capacity.
2. Load without " is intended for storage load and based on ISO 9907. Rated loads should exceed 70% of storage capacity.



25UF

