Michael Burdge EST. 1992

Agricultural Machinery Sales

Michael Burdge Limited Pilhay Farm Bristol Road Hewish North Somerset BS24 6SN

Make: SUNWARD Model: SWE 25UF

Price: POA


Make / Model: SUNWARD SWE 25UF

Year: 2025

Condition: Brand New


Additional Spec:


- Machine weight: 2650kg
- 5 year warranty
- 3 year full engine warranty
- Yanmar EU stage V engine
- Complete with 3 buckets
- Hydraulic quick hitch
- Zero tail swing
- 2 speed tracking

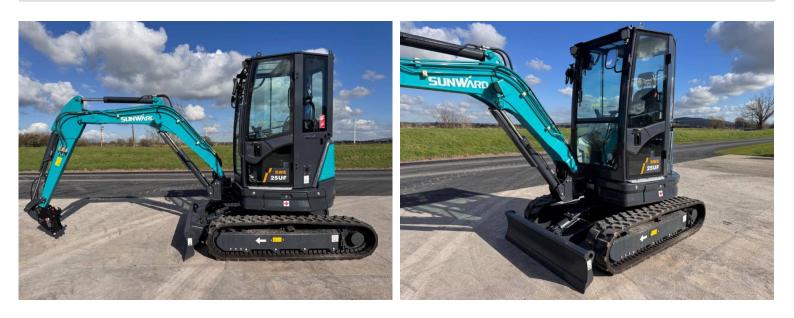

+44 (0)1934 838385 michael@michaelburdge.com

Ref: SUN5005

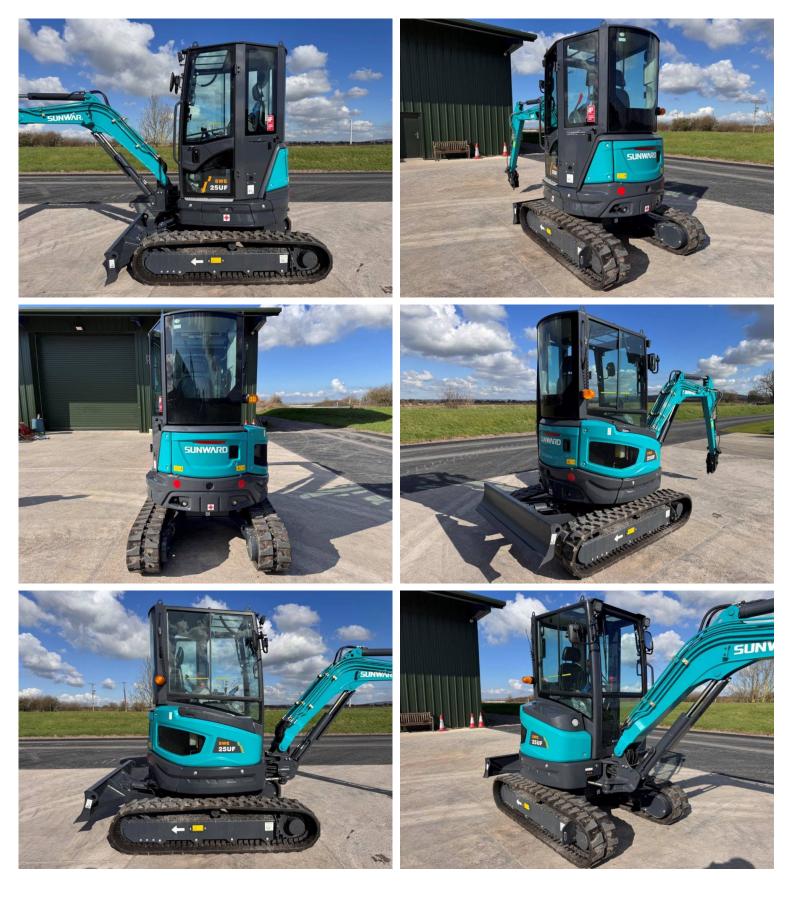

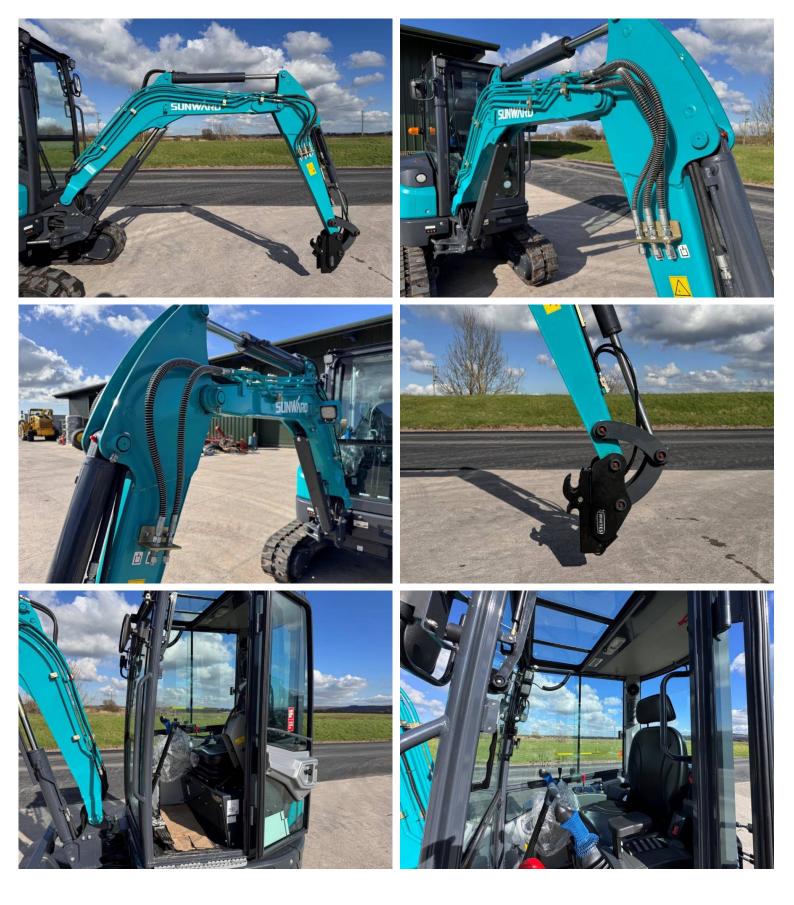



able, Powerful and Durable

<text>



ICAL PARAMETERS





Dest ungging unces and uning "decin capacity on the market The SHE 251 and SHE 254 have exceptional digits forces - 244k (backet) and 14 kl/pm)easily hinking viz Secondario compaties to the market. And what comes to their ling mark capacity, the SHE 251 bolon ryfeler design powdes a manimum mark of over 44 metror (444 benum), and that avoid all between the secondaria adjust pranch that's over 47 metror (4775 mm) long - making these 2 mill excavation the benchmark

otection pattes for boom diazer cyclinder diazer cyclinder and caser cyclinder and caser cyclinder and caser cyclinder and cyclinder and are than the cyclinder and are the cyclinder and are the cyclinder and are the cyclinder and are the cyclinder and the cyclinder and are the cyclinder and the cyclinder and are the cyclinder and are the cyclinder and are the cyclinder and are the cyclinder and the cyclinder and are the cyclinder and the cyclinder and are the cyclinder and the cyclinder the cyclinder and the cy





atile and Optimized

SMOOTH OPERATIONS Thanks to

Pilot traveling contro

ring and design produce optimal, versatile machines

Auto gear shifting dui traveling



iliary lines as standard e complete auxiliary settings built in as standar -tail SWE 25UF provide fully adjustable pressure for all types of attachments on any job site.

that 3 spentra availary line as a tackwaid (shish be the sense statuticity), share an distributed as the other and the sense of the sense of the sense of the arm (LDCC), which is used primarily for the sense of the sense as a vector for a statements that are explored (RC)








Compact and neat - easy to transport to any job site

		SWE 25F	SWE250F
		Cab/canepy	Catu/canopy
		0.08m3	6.08 m ²
		580 mm	580 mm
REGRI		2640kg	2850/2550 kg
	Dveral dimension (L + W + H)	4 262 × 1500 × 2 400 mm	4 140 + 1 500 × 2 455 mm
	Minimum-ground clearance	280 mn	310 mm
	Brand	YEMMER	YAMOOR
	Model	17m/07-523	10w804-5P38
	Emission rating	El Stage V	EU Stage V
	Diglacement	12871	12671
	Detput	14.8/040E1x8/rpm	54.8/0400 kB(hpm
	Ter .	Rubber track/steel track	Rabber track/steel track
	Robber shoe width	300 mn	380 mm
	Tracklength	1990 mm	1990 mm
	Length to center of rollers	1960 mm	1560 mm
	Length to center of track	1200 mm	1290 mm
	Traveling speed (Kigh/Low)	44/25 km/h	45/2.4km/h
	Gradeublity	30 deg	30 deg
110		1 pm	Non
RESSURE		25 kps	25.1 kpa
	Weth	1500 mm	1580 mm
	Reight	35 m	32i nm
	Lifting capacity (Height, Depth)	330/328 mm	331/320 mm
	1pr	1 sociable pinton pump	2 sariable plunger pumps, 1 gear pump
	Displacement	19771,/min	2*28.8+8.2+6.51,/min
	Rydraulic pressure	24.5 Mpa	2*215-18 MPa
		piston mator	pistus mator
1708		2-speed pixtus matur	pistus mator
CAPACITY		42.51	251
C OL TANK CAPACI	× .	301	241



Incorporated in England and Wales Company number: 03184184