

Make: SUNWARD
Model: SWE 60UF

Price: POA

Ref: SUN5009

Make / Model: SUNWARD SWE 60UF

Year: 2025

Condition: Brand New

Additional Spec:

- Machine weight: 5750kg
- 5 year warranty
- 3 year full engine warranty
- Kubota EU stage V engine
- Complete with 3 buckets
- Hydraulic quick hitch
- Zero tail swing
- 2 speed tracking












SWE60UF Technical Parameters			
Overall dimension (L x W x H)		mm	5500X1980X2550
Dimensions	A Length to center of rollers	mm	1965
	B Total track length	mm	2490
	C Ground clearance of platform	mm	640
	D Platform tail slewing radius	mm	1050
	E Chassis width	mm	1980
	F Track width	mm	400
	G Chassis clearance from the ground	mm	330
	H Track height	mm	575
	I Total length	mm	5500
	J Cab roof height	mm	2550
Working range	K Upper-carriage width	mm	1845
	a Max. cutting height	mm	5610
	b Max. unloading height	mm	3950
	c Max. digging depth	mm	3710
	d Max. vertical digging depth	mm	3199
	e Max. digging reach	mm	6235
	f Max. digging reach at ground level	mm	6105
	g Max. lift height of the dozer blade	mm	445
	h Max. digging depth of the dozer blade	mm	400
	i Swing radius (min.)	mm	2475
Machine weight	l Dozer blade length x width	mm	1950X390
	with rubber track	kg	5700
	with steel track	kg	5770
	Standard bucket capacity	m ³	0.18
	Digging force (bucket) (ISO)	kN	46.8
	Digging force (arm) (ISO)	kN	31.1
	Maximum traction force	kN	49
	Slew angle (boom)	°	R50/L70
	Traveling speed (Max/Min)	km/h	4.07/2.43
	Gradeability	°	35
Engine	Ground pressure	kPa	33.87
	Swinging speed	rpm	9.4
	Brand		KUBOTA
	Model		V2607-DI-T-ET21
	Type		4-cylinder and 4-stroke water cooling
	Displacement	L	2.615
	Power/speed (gross/net)	kW/rpm	36.5/2000 36/2000
	Fuel tank capacity	L	70
	Type		2 variable plunger pumps and 1 gear
	Displacement	L/min	2x59+42
Primary pump	Pressure of main relief valve	MPa	2x24.5+21
	Hydraulic tank capacity	L	70

Load Capacity:

Lift Point Height	Lift Point Radius(MAQ)		Lift Point Radius(5.0m)		Lift Point Radius(4.0m)		Lift Point Radius(3.0m)	
	Over-ten(tg)	Over-side(tg)	Over-ten(tg)	Over-side(tg)	Over-ten(tg)	Over-side(tg)	Over-ten(tg)	Over-side(tg)
4.0	915.0*	832.5*	—	—	—	—	—	—
3.0	785.0*	675.0*	—	—	1080.0*	837.5*	—	—
2.0	705.0*	577.5*	753.8*	637.8*	1125.0*	930.0*	1980.0*	1402.0*
1.0	575.0*	547.5*	682.5*	607.5*	855.0*	847.5*	1590.0*	1290.0*
0.0	522.5*	540.0*	630.0*	577.5*	807.5*	785.0*	1350.0*	1125.0*
-1.0	482.5*	590.0*	—	—	862.5*	755.0*	1267.5*	1065.0*
-2.0	785.0*	727.5*	—	—	855.0*	750.0*	1140.0*	890.0*

Notes:

1. Load with * is limited by hydraulic capacity and based on ISO 10567.Rated loads do not exceed 87% of hydraulic capacity.
2. Load without * is limited by tipping load and based on ISO 10567.Rated loads do not exceed 75% of tipping capacity.

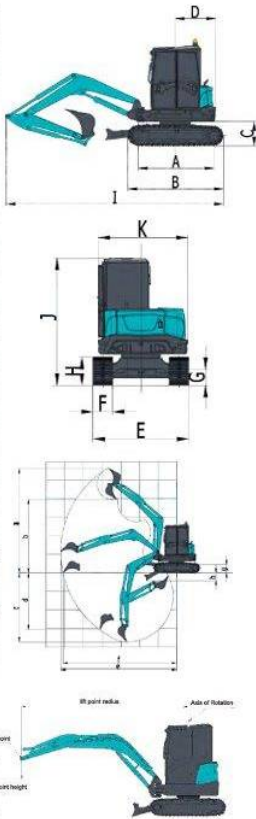

Incorporated in England and Wales Company number: 03184184