

Trailer Specification

TRI AXLE TRAILER

STANDARD TRAILER (Capacities)	FM 24	FM 26
Width Front (Inside)	2.29m	2.29
Width Rear (Inside)	2.39m	2.39m
Length (Body)	7.32m (24ft)	7.93m (26ft)
Height (Body)	1.675m (5'6")	1.675m (5'6")
Sides	3mm	3mm
Floor	5mm (One Piece)	5mm (One Piece)
Volume (Level Grain c/w 5'6" Body)	28 cu.m	28 cu.m
Volume (Level Grain c/w 6' Body)	30.7 cu.m	33.25 cu.m
Height of Floor from Ground	1.2m (48")	1.2 (48")
Overall Height	2.875m	2.875m
Overall Length of Trailer	7.45m	8m
Overall Width of Trailer	2.55m	2.55m
Angle of Tip	51 ^o	51 ^o
Hydraulic Cylinders	Two Four-stage chrome	Two Four-stage chrome
Oil Requirement	39 ltrs	39 ltrs
Axle Beam Size	127mm round	127mm round
Axle Wheel Track	2040mm	2040mm
Standard Tyre Size	385/65-22.5	385/65-22.5
Type of Axle	10 stud commercial (420x180 Brake)	10 stud commercial (420x180 Brake)
Sprung Drawbar	Standard	Standard
Overall Height tipped	7.47m (24'6")	7.98m (26'2")
Overall Height tipped (silage)	8m (26'6")	8.59m (28'2")
Unladen Weight	7000kg	7200kg
L.E.D Lights	Standard	Standard

Silage Trailer

Additional Height	31.5" (0.8m)	31.5" (0.8m)
Volume (Level Capacity)	42.4 cu.m	45.9 cu.m

Optional Extras

Silage Sides
Hydraulic Graindoor
Hydraulic Jack
Grain Chute
Rollover Cover
Swivel Hitch
Spoon Hitch
Automatic Reversing Lights
Different Body Heights
Air Brakes (c/w Load Sensing)
Hydraulic Load Sensing Brakes
(c/w 35mm brake rams)

We Fit A Wide Range Of Tyres Please Call For Details

Smyth Trailers Ireland Ltd. reserve the right to
change specifications without notice
Weights and measurements based on a standard
trailer without extras.



SMYTH TRAILERS IRELAND LTD.


GARRYHILL,
BAGENALSTOWN,
CO. CARLOW.
Tel. (059) 9157652
from UK & International
(00 353 59) 9157652

Website: www.smythtrailers.com
E-mail: sales@smythtrailers.com

www.smythtrailers.com

SMYTH TRAILERS FIELDMASTER SMYTH TRAILERS

YOUR VIEW FROM
THE DRIVER'S SEAT

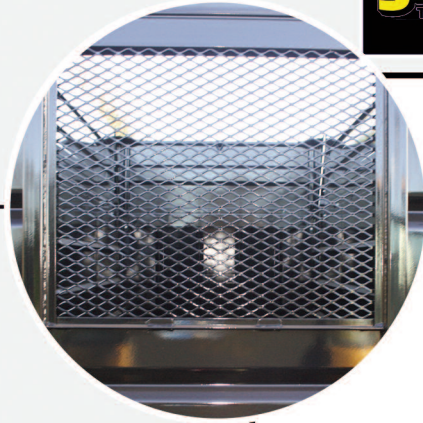

ADDITIONAL REAR DOOR
LIGHTS AND STROBE LIGHT
FOR EXTRA SAFETY



LED LIGHTS & NUMBER
PLATE HOLDER
FITTED AS STANDARD



LARGE REMOVABLE
ALUMINIUM PANEL



REAR DOOR
SECURELY LOCKED




ONE PIECE FULLY
SEALED LIGHTWEIGHT
SILAGE SIDES



HOSE TIDY




SAFETY PROP &
CHROME TIPPING RAMS

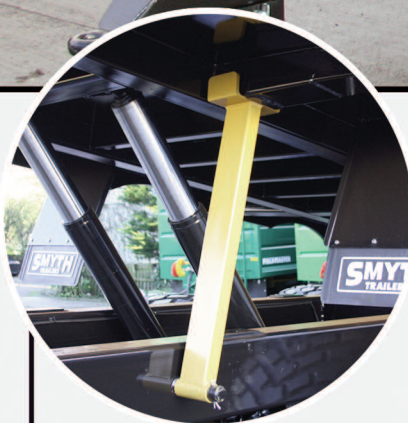

SILAGE EXTENSION
INSIDE REAR PILLARS
(CAN'T BE PULLED OFF
BY BRANCHES)



AIR BRAKES AND/OR
HYDRAULIC BRAKES C/W
LOAD SENSING
DRAW BAR MOUNTED FOR
NEAR ABS LIKE PERFORMANCE

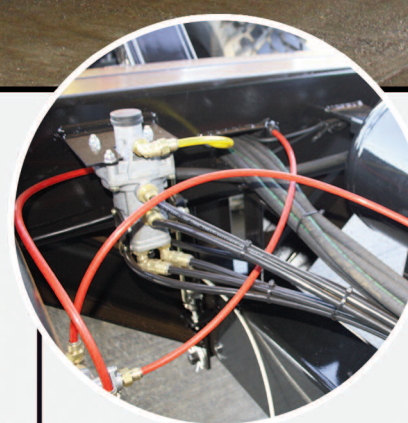

NO REAR DOOR ARMS OUT
WIDER THAN THE BODY
BELOW 7 FEET
(HIGHER THAN A GATE POST!)



HEAVY DUTY SPRINGS
4"X2" (100X50MM)
FOR UNRIVALED STABILITY
(EXCLUSIVE TO SMYTH TRAILERS)

