

Trailer Specification

CONTRACTOR RANGE

STANDARD TRAILER (Capacities)	16 Tonne	18 Tonne	20 Tonne
Width Front (Inside)	90" (2.29m)	90" (2.29m)	90" (2.29m)
Width Rear (Inside)	94" (2.39m)	94" (2.39m)	94" (2.39m)
Length (Body)	18' (5.486m)	20' (6.096m)	22' (6.710m)
Height (Body)	5'6" (1.676m)	5'6" (1.676m)	5'6" (1.676m)
Sides	3mm	3mm	3mm
Floor	5mm (One Piece)	5mm (One Piece)	5mm (One Piece)
Volume (Level Grain)	21.5 cu.m (758 cu.ft)	23.8 cu.m (842 cu.ft)	26.2cu.m (926 cu.ft)
Height of Floor from Ground	4" (1.219m)	4" (1.219m)	4" (1.219m)
Overall Height	114" (2.89m)	114" (2.89m)	114" (2.89m)
Overall Length of Trailer	22'6" (6.858m)	24'6" (7.467m)	26'6" (8.082m)
Overall Width of Trailer	8'4" (2.54m)	8'4" (2.54m)	8'4" (2.54m)
Angle of Tip	51º	51º	51º
Hydraulic Cylinders	Two Three-stage chrome	Two Three-stage chrome	Two Three-stage chrome
Oil Requirement	32 ltrs	38 ltrs	38 ltrs
Axle Beam Size	127mm round	127mm round	127mm round
Axle Wheel Track	79" (2.010m)	79" (2.010m)	79" (2.010m)
Standard Tyre Size	385/65-22.5	385/65-22.5	385/65-22.5
Type of Axle	10 stud commercial (420x180 Brake)	10 stud commercial (420x180 Brake)	10 stud commercial (420x180 Brake)
Sprung Drawbar	Standard	Standard	Standard
Overall Height tipped	20' (6.096m)	21'8" (6.604m)	23'4" (7.116m)
Overall Height tipped (silage)	22'1" (6.731m)	23'9" (7.239m)	25'5" (7.755m)
Unladen Weight	4.9 tonnes	5.2 tonnes	5.5 tonnes
L.E.D Lights	Standard	Standard	Standard

Silage Trailer

Additional Height	31.5" (0.8m)	31.5" (0.8m)	31.5" (0.8m)
Volume (Level Capacity)	31.8cu.m (1123cu.ft)	35.3cu.m (1247cu.ft)	38.9cu.m (1372cu.ft)

Optional Extras

- Different Body Heights
- Silage Sides
- Hydraulic Graindoor
- Hydraulic Jack
- Grain Chute
- Rollover Cover
- Swivel Hitch
- Spoon Hitch
- Air Brakes (c/w Load Sensing)
- Hydraulic Load Sensing Brakes
- Automatic Reversing Lights
(c/w 35mm brake rams)

We Fit A Wide Range Of Tyres Please Call For Details

SP4

Smyth Trailers Ireland Ltd. reserve the right to
change specifications without notice
Weights and measurements based on a standard
trailer without extras.



SMYTH TRAILERS IRELAND LTD.

GARRYHILL,
BAGENALSTOWN,
CO. CARLOW.
Tel. (059) 9157652
from UK & International
(00 353 59) 9157652

Website: www.smythtrailers.com
E-mail: sales@smythtrailers.com

www.smythtrailers.com

YOUR VIEW FROM
THE DRIVER'S SEAT



ADDITIONAL REAR DOOR
LIGHTS AND STROBE LIGHT
FOR EXTRA SAFETY




REAR HITCH
C/W 7 PIN SOCKET
& HYDRAULIC BRAKE
CONNECTION




LARGE REMOVABLE
ALUMINIUM PANEL



LED LIGHTS & NUMBER
PLATE HOLDER
FITTED AS STANDARD

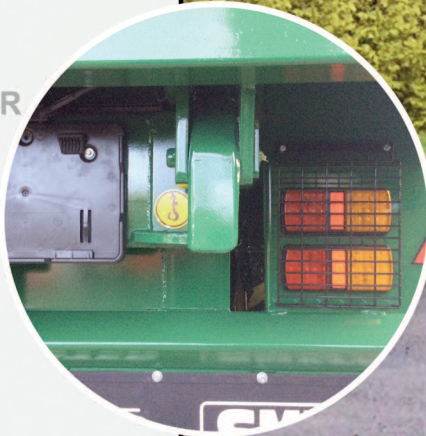

ONE PIECE FULLY
SEALED LIGHTWEIGHT
SILAGE SIDES

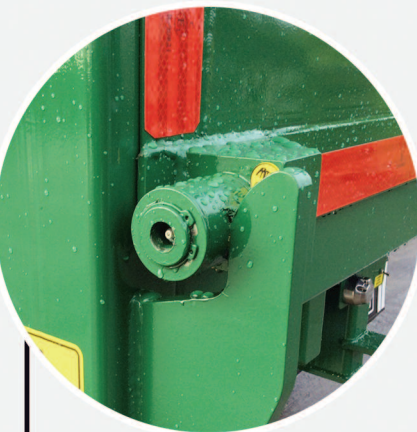

REAR DOOR
SECURELY LOCKED




HOSE TIDY



SAFETY PROP AND
CHROME TIPPING RAMS




SILAGE EXTENSION
INSIDE REAR PILLARS
(CAN'T BE PULLED OFF
BY BRANCHES)

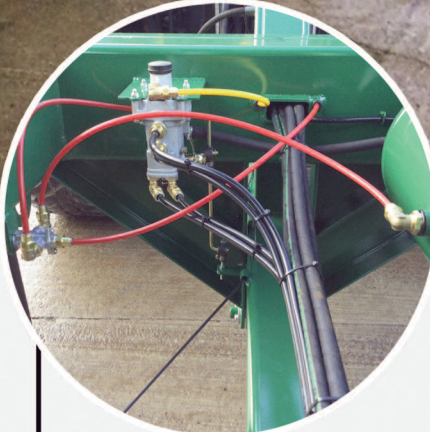

AIR BRAKES AND/OR
HYDRAULIC BRAKES C/W
LOAD SENSING (OPTIONAL)
DRAW BAR MOUNTED FOR
NEAR ABS LIKE PERFORMANCE



NO REAR DOOR ARMS OUT
WIDER THAN THE BODY
BELOW 7 FEET
(HIGHER THAN A GATE POST!)

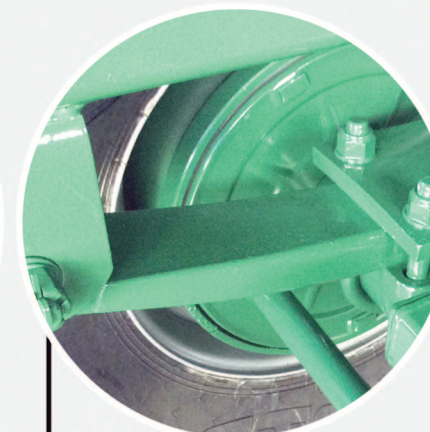

HEAVY DUTY SPRINGS
4"X2" (100X50MM)
FOR UNRIVALED STABILITY
(EXCLUSIVE TO SMYTH TRAILERS)